




FRANTUMATORE GIREVOLE

ROTATING PULVERIZER
 BROYEUR ROTATIF
 DEMOLEDOR ROTATIVO
 DREHBARE PULVERISIERER
 GARRA PULVERIZADORA



model				model			
	8	ton	14		49	ton	70
FR 09RD	9 12			FR 50RD	51 67		
FR 13RD	12 17			FR 70RD	66 88		
FR 15RD	15 23			FR 100N	84 135		
FR 20RD	21 30			FR 200	95 205		
FR 25RD	28 38			FR 250	95 275		
FR 35RD	34 53						

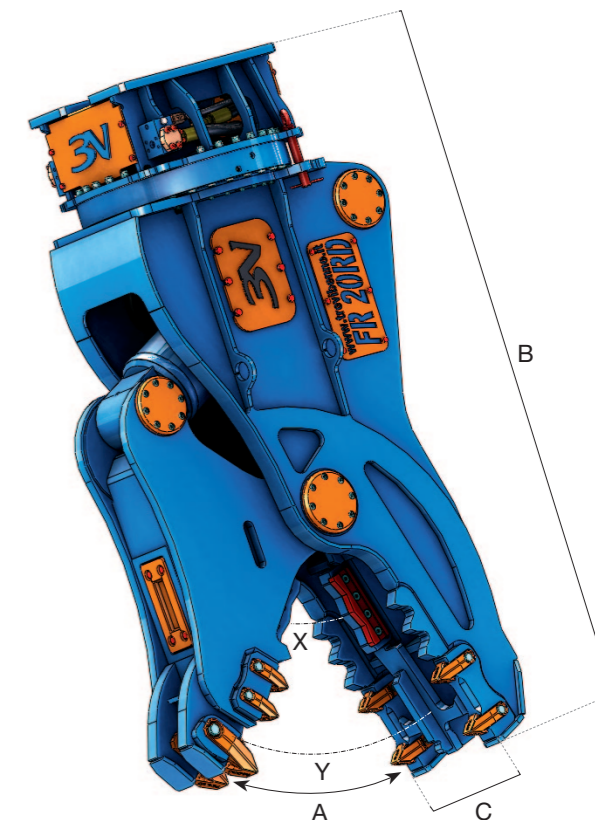

- (1) Accoppiamento escavatore-attrezzatura ottimale / Optimum excavator-equipment combination
 Couplage pelle-équipement optimale / Acoplamiento excavadora-implimento optimal
 Optimale Bagger-Ausrüstung Kombination / Combinação máquina-implimento ideal
- (2) Accoppiamento escavatore-attrezzatura possibile / Possible excavator-equipment combination
 Couplage pelle-équipement possible / Acoplamiento excavadora-implimento posible
 Mögliche Bagger-Ausrüstung Kombination / Combinação máquina-implimento possível



		FR 09RD*	FR 13RD*	FR 15RD*	FR 20RD*
	kg.	920	1320	1890	2400
A	mm.	655	705	780	880
B	mm.	1730	1920	2180	2410
C	mm.	360	410	520	520
	mm.	140	220	220	260
X	t.	85	140	190	205
Y	t.	40	55	65	80
∅ max	mm.	25	30	35	40
	bar	310	310	310	310
	l/min.	150 / 250	180 / 250	180 / 250	200 / 300
	bar	140	140	140	140
	l/min.	10	10	10	10
	/	/	/	/	/

(*) Modello disponibile con denti intercambiabili imbullonati
 (*) Bolted interchangeable teeth version available
 (*) Modèle disponible avec dents boulonnées interchangeables

		FR 25RD*	FR 35RD*	FR 50RD*	FR 70RD*	FR 100N	FR 200	FR 250
	kg.	3100	3450	5190	7250	11450	20580	24640
A	mm.	915	980	1120	1320	1700	1900	2050
B	mm.	2520	2560	2840	3250	3850	4480	5140
C	mm.	600	640	735	790	970	1400	1400
	mm.	260	260	260	325	500	500	500
X	t.	230	350	380	490	545	860	990
Y	t.	105	120	140	180	235	380	410
∅ max	mm.	45	50	60	75	90	100	110
	bar	310	310	340	340	340	340	340
	l/min.	250 / 350	300 / 400	400 / 500	450 / 600	500 / 800	900 / 1200	900 / 1200
	bar	140	140	140	140	140	140	140
	l/min.	10	10	30	30	50	50	50
	/	/	/	✓	✓	✓	✓	✓

(*) Modelo equipado con dientes intercambiables atornillados
 (*) Model mit verschraubten Wechselzähnen
 (*) Modelo disponível com dentes intercambiáveis aparafusados