



# Serie F **PREMIUM** line

## FRANTUMATORE SECONDARIO


SECONDARY PULVERIZER

BROYEUR HYDRAULIQUE

DEMOLEDOR SECUNDARIO


STARRE PULVERISIERER

GARRA PULVERIZADORA FIXAS



**(1)** Accoppiamento escavatore-attrezzatura ottimale  
*Optimum excavator-equipment combination*  
 Couplage pelle-équipement optimal  
 Acoplamiento excavadora-implemento optimal  
 Optimale Bagger-Ausrüstung Kombination  
 Combinação máquina-implemento ideal

**(2)** Accoppiamento escavatore-attrezzatura possibile  
*Possible excavator-equipment combination*  
 Couplage pelle-équipement possible  
 Acoplamiento excavadora-implemento posible  
 Mögliche Bagger-Ausrüstung Kombination  
 Combinação máquina-implemento possível

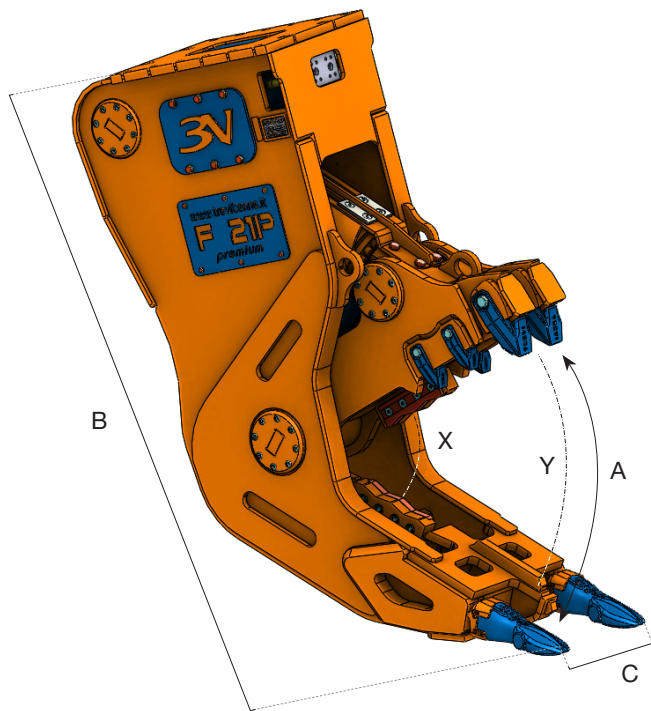

		F 21P	F 23P	F 28P
kg	kg.	2055	2520	2660
A	mm.	835	835	890
B	mm.	1845	2215	1955
C	mm.	540	540	670
	mm.	260	260	260
X	t.	250	250	270
Y	t.	100	100	115
∅ max	mm.	45	45	55
	bar	250	250	250
	l/min.	180 / 250	180 / 250	230 / 300
	bar	/	140	/
	l/min.	/	10	/
		/	/	/